

NINGBO FLOURISH AUTOPARTS CO.,LTD

Tyre Valve
Wheel Lug Nut
Wheel Balance Weight
Tools and Accessory

Thread: M12*1.25, M12*1.5, 7/16"-20, 1/2"-20, M14*1.5, M14*2, 3/8"-24, M12*1.75, 9/16"-18, M10*1.25

輪殼螺栓螺母

WHEEL BOLT/NUT



NINGBO FLOURISH AUTOPARTS CO.,LTD

Tyre Valve
Wheel Lug Nut
Wheel Balance Weight
Tools and Accessory

Thread: M12*1.25, M12*1.5, 7/16"-20, 1/2"-20, M14*1.5, M14*2, 3/8"-24, M12*1.75, 9/16"-18, M10*1.25

輪殼螺栓螺母

WHEEL BOLT/NUT



NINGBO FLOURISH AUTOPARTS CO.,LTD

Tyre Valve
Wheel Lug Nut
Wheel Balance Weight
Tools and Accessory

Thread: M12*1.25, M12*1.5, 7/16"-20, 1/2"-20, M14*1.5, M14*2, 3/8"-24, M12*1.75, 9/16"-18, M10*1.25

輪殼螺栓螺母

WHEEL BOLT/NUT



WN047
24mm HEX
Ø28mm

WN048
17mm HEX
Ø23mm

WN049
3/4"HEX
Ø24mm

WN050
3/4"HEX
Ø23mm

WN051
3/4"HEX
Ø30mm

WN052
21mm HEX
Ø28mm

WN053
21mm HEX
Ø28mm



WN054
21mm HEX
Ø28mm

WN055
22mm HEX
Ø36mm

WN056
13/16"HEX
Ø36mm

WN057
3/4"HEX
Ø26.5mm

WN058
13/16"HEX
Ø26.5mm

WN059
21mm HEX
Ø26mm

WN060
Ø20mm



WN061
Ø20mm
Ø19mm

WN062
Ø20mm

WN063
Ø20mm

WN064
12mm HEX
21mm HEX

WN065
12mm HEX
19&21mm HEX

WN066
12mm HEX
19&21mm HEX

WN067
12mm HEX
21mm HEX


WN068
Ø20mm

sales@flourish-autoparts.cn


www.flourish-autoparts.cn

Ningbo City, Zhejiang, China

Thread: M12*1.25, M12*1.5, M14*1.5

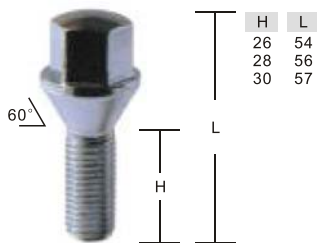


WB001
17mm HEX
Ø23mm

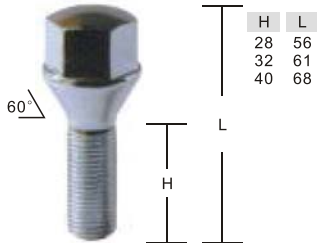


WB002
19mm HEX
Ø23mm



WB003
17mm HEX
Ø21.5mm

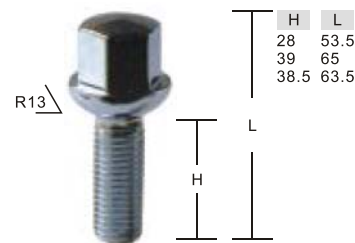


WB004
17mm HEX
Ø23mm

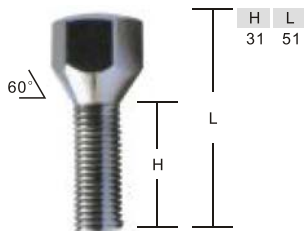


WB005
19mm HEX



WB006
13/16"HEX

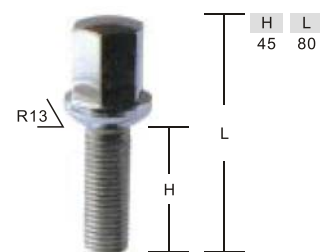


WB007
17mm HEX
Ø23mm

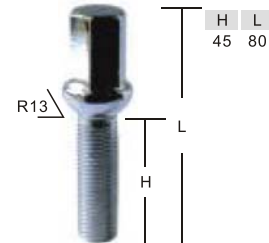


WB008
17mm HEX


Thread: M12*1.25, M12*1.5, M14*1.5




WB009
17mm HEX
ø21.5mm




WB010
17mm HEX
ø22mm




WB011
17mm HEX
ø22mm




WB012
19mm HEX
ø21.5mm




WB013
17mm HEX



WB014
17mm HEX
ø21.5mm



WB015
17mm HEX
ø21.5mm



WB016



Item	Etrto No.	Rim Hole mm/inch	Eff.Length mm/inch	Fit for
TR412	V2.03.6	11.5/.453"	22/0.88"	motorcycle ,car
TR413	V2.03.1	11.5/.453"	32/1.25"	car
TR414	V2.03.2	11.5/.453"	38/1.50"	car
TR415	V2.03.3	15.8/.625"	32/1.25"	car
TR418	V2.03.4	11.5/.453"	51/2.00"	car
TR438	V2.03.5	8.8/.346"	32/1.25"	motorcycle ,car
TR423		11.5/.453"	64/2.5"	car
TR425		11.5/.453"	51/2.00"	car



轮胎充气嘴

TYRE VALVE

Item	Etrto No.	Rim Hole mm/inch	Eff.Length mm/inch	Fit for
TR412C	V2.03.6	11.5/.453"	22/0.88"	motorcycle ,car
TR413C	V2.03.1	11.5/.453"	32/1.25"	car
TR414C	V2.03.2	11.5/.453"	38/1.50"	car
TR415C	V2.03.3	15.8/.625"	32/1.25"	car
TR418C	V2.03.4	11.5/.453"	51/2.00"	car
TR412AC	V2.03.6	11.5/.453"	22/0.88"	motorcycle ,car
TR413AC	V2.03.1	11.5/.453"	32/1.25"	car
TR414AC	V2.03.2	11.5/.453"	38/1.50"	car



TR33E TR43E TR48E



VS-8 VS-8-45 VS-8-90



VAMD161 TR416 TR416B TR416S TR416SS

Item	Etcto No.	Rim Hole mm/inch	Ref.Length mm
V-3	TR33E	11.5/.453"	14*33
V-4	TR43E	11.5/.453"	14*43
V-5	TR48E	11.5/.453"	14*48
V-7	TR63E	11.5/.453"	14*63
VS-8		11.5/.453"	16*38
VS-8-45		11.5/.453"	16*53
VS-8-90		11.5/.453"	16*63
VAMD161		11.5/.453"	16*33
TR416		16/.625"	18.5*40
TR416B		11.5/.453"	17*38
TR416S		11.5/.453"	17*40
TR416SS		11.5/.453"	14*38

轮胎充气嘴

TYRE VALVE



TR575

TR501

TR500



TR570

TR570-27°

TR570C

Item	Etrto No.	Rim Hole mm/inch	Eff.Length mm/inch	Bend Degree
TR500	V3.21.3	15.9/.625"	55	/
TR501	V3.21.2	15.9/.625"	42	/
TR570	V3.21.4	15.9/.625"	84	/
TR571	V3.21.5	15.9/.625"	90	/
TR572	V3.21.6	15.9/.625"	100	/
TR573	V3.21.7	15.9/.625"	115	/
TR574	V3.21.8	15.9/.625"	131	/
TR575	V3.21.1	15.9/.625"	33	/
TR570-27°	V3.21.4	15.9/.625"	84	27°
TR571-27°	V3.21.5	15.9/.625"	90	27°
TR572-27°	V3.21.6	15.9/.625"	100	27°
TR573-27°	V3.21.7	15.9/.625"	115	27°
TR574-27°	V3.21.8	15.9/.625"	131	27°
TR570C	V3.21.4	15.9/.625"	84	90°
TR571C	V3.21.5	15.9/.625"	90	90°
TR572C	V3.21.6	15.9/.625"	100	90°
TR573C	V3.21.7	15.9/.625"	115	90°
TR574C	V3.21.8	15.9/.625"	131	90°



V3.20.1

V3.20.4

V3.22.1



70MS-7

Item	Rim Hole mm/inch	Eff.Length mm/inch	Bend Degree
V3.20.1	9.7	41	/
V3.20.2	9.7	95	17.5°
V3.20.3	9.7	87	/
V3.20.4	9.7	90	27°
V3.20.5	9.7	70	27°
V3.20.6	9.7	115	27°
V3.20.7	9.7	80	27°
V3.20.8	9.7	119	12°
V3.20.9	9.7	102	27°
V3.20.10	9.7	80	27°
V3.20.11	9.7	100	27°
V3.20.12	9.7	100	27°
V3.22.1	9.7	58	45°
70MS-7	9.7	69	7°



Item	Ref.Length (mm)	A (mm)	Core Housing	Lock Nut
TR218A	/	62.68	TRCH3	LN10 or LN10EQ
TR220A	/	81.4	TRCH3	LN10 or LN10EQ
TR618A	22.5*48	/	TRCH3	HN1
sales@flourish-autoparts.cn		www.flourish-autoparts.cn	Ningbo City, Zhejiang, China	



Item Number	Eff.Length mm	Bend Degree	Core
TR621A	Φ 22.5*93*113	65°	9002
TR622A	Φ 22.5*137*158	90°	9002
TR623A	Φ 22.5*74*95	65°	9002
TRJ650-03	27+80mm	100°	7002
TRJ651-03	32+119mm	90°	7002
TRJ652-03	27+140mm	94°	7002
TRJ653-03	27+63.5mm	100°	7002
TRJ654-03	27+79.5mm	120°	7002
TRJ655-03	27+79.5mm	106°	7002
TRJ656-03	66.5+94mm	90°	7002
TRJ657-03	27+101.6mm	100°	7002
TRJ658-03	27+140mm	100°	7002
TRJ659-03	48+90mm	90°	7002
TRJ660-03	48+223mm	90°	7002
TRJ669-03	27+63.5mm	90°	7002
TRJ670-03	41mm	/	7002





round angle ,(5+10)g*4 , Zinc plated



round angle ,(5+10)g*4 , Epoxy coated



round angle ,(5+10)g*4 , Black Treatment

Steel Material ,Adhesive Balance Weight :

- ✦ Steel ,Lead-free to comply with European standard
- ✦ Perfect finish to resist rust
- ✦ Adhesive tape can bear temperature range : -20°C ~ 120°C

Item	Weight (g)	Description	pcs/box	Packing box/ctn	Surface Treatment
SABW01	60g	(5g+10g)*4 segments Height * Width =3.8mm*19mm	100	4	Zinc plated
SABW02	60g	(5g+10g)*4 segments Height * Width =3.8mm*19mm	100	4	Epoxy coated
SABW03	60g	(5g+10g)*4 segments Height * Width =3.8mm*19mm	100	4	Black Treatment



round angle , 5g*12 , Zinc plated



round angle , 5g*12 , Epoxy coated



round angle , 5g*12 , Black Treatment

Steel Material ,Adhesive Balance Weight :

- ✦ Steel ,Lead-free to comply with European standard
- ✦ Perfect finish to resist rust
- ✦ Adhesive tape can bear temperature range : -20°C ~ 120°C

Item	Weight (g)	Description	pcs/box	Packing box/ctn	Surface Treatment
SABW04	60g	5g*12 segments Height * Width =3.8mm*19mm	100	4	Zinc plated
SABW05	60g	5g*12 segments Height * Width =3.8mm*19mm	100	4	Epoxy coated
SABW06	60g	5g*12 segments Height * Width =3.8mm*19mm	100	4	Black Treatment



Steel Material ,Adhesive Balance Weight :

- ★ Steel ,Lead-free to comply with European standard
- ★ Perfect finish to resist rust
- ★ Adhesive tape can bear temperature range : -20°C ~ 120°C

Item	Weight (g)	Description	pcs/box	Packing box/ctn	Surface Treatment
SABW15	84g	1/4 oz*12 segments Height * Width =4.8mm*19mm	50	4	Zinc plated
SABW16	84g	1/4 oz*12 segments Height * Width =4.8mm*19mm	50	4	Epoxy coated



Steel Material ,Adhesive Balance Weight :

- * Steel ,Lead-free to comply with European standard
- * Perfect finish to resist rust
- * Adhesive tape can bear temperature range : -20°C ~ 120°C

Item	Weight (g)	Description	pcs/box	Packing box/ctn	Surface Treatment
SABW17	84g	1/2oz*6 segments Height * Width =3.8mm*19mm	50	4	Zinc plated
SABW18	84g	1/2oz*6 segments Height * Width =3.8mm*19mm	50	4	Epoxy coated
SABW19	168g	1oz*6 segments Height * Width =6.5mm*19mm	30	6	Zinc plated
SABW20	168g	1oz*6 segments Height * Width =6.5mm*19mm	30	6	Epoxy coated



VT-1



VT-2



VT-3



VS-1



CT-1



CT-2



CT-3



CT-4



VIT-1



VIT-2




VIT-3



VIT-4

Item	Description
VT-1	tyre valve spanner ,silver color
VT-2	tyre valve spanner ,black color
VT-3	tyre valve spanner ,black color
VS-1	roller diameter 3mm
VS-2	roller diameter 5mm
VS-3	roller diameter 6mm or 12mm etc.
CT-1	70mm handle ,100mm silver needle
CT-2	70mm handle ,25mm silver needle
CT-3	73mm handle ,25mm+28mm silver needle
CT-4	core remover
VIT-1	valve installation tool
VIT-2	valve installation tool
VIT-3	valve installation tool
VIT-4	valve installation tool



Item	Size(mm) Length*Diameater	Inner Packing pcs/box	Description
TSS01	100*3.5	120	Black string
TSS02	100*3.5	120	Blown string
TSS03	100*4.5	60	Black string
TSS04	100*4.5	60	Blown string
TSS05	100*6	60	Black string
TSS06	100*6	60	Blown string
TSS07	200*3.5	60	Black string
TSS08	200*3.5	60	Blown string
TSS09	200*4.5	30	Black string
TSS10	200*4.5	30	Blown string
TSS11	200*6	30	Black string
TSS12	200*6	30	Blown string

Tyre Seal String :

- ✦ Universal string inserts can easily and fast repair small injuries.
- ✦ Temporary repairs by compression only.
- ✦ Flow-Seal inserts are ideal for use in both Bias Tyre and Radial Tyre.